



AG46 Low-Profile Series MIMO 2-Lead M2M IoT Antenna
MIMO Cellular 4G LTE CBRS 5G NR / GPS GNSS
MIMO Multi-Band WiFi 5 / WiFi HaLow / Bluetooth
Built-In Ground Plane / Bolt Mount / Mag Mount / Adhesive Mount

AG46 MIMO 2-Lead Low-Profile Series Mobility M2M IoT Antenna Multi-Carrier MIMO Cellular 4G LTE CBRS 5G NR / GPS GNSS / MIMO Multi Band WiFi 5 (2.4GHz ~5GHz) / Bluetooth (2.4GHz)	
4G LTE CBRS 5G NR Frequency Range Bluetooth (2.4GHz) WiFi 5 Frequency Range	617-960MHz / 1710-5000MHz 2.4-2.5GHz / 4.9-5GHz (Concurrent)
4G CBRS 5G NR Avg. Peak Gain: <i>Isotropic</i> WiFi 5 / Bluetooth Avg. Peak Gain: <i>Isotropic</i>	(1.9dBi) 617-960MHz / (2dBi) 1710-3800MHz / (2dBi) 4900-5000MHz / (2.1dBi) CBRS 3.5GHz (2dBi) 2.4-2.5GHz / (2dBi) 4.9-5GHz
Typical Efficiency 4G 5G Elements	617-960MHz >70% 1710-3800MHz >70% 4900-5000MHz >85%
Typical Efficiency WiFi / Bluetooth Elements	>70%
Isolation 4G 5G Elements Isolation WiFi / Bluetooth Elements	>10dB >12dB
Correlation Co-efficient 4G 5G Elements Correlation Co-efficient WiFi / BT Elements	<0.2 <0.1
Nominal Impedance	50Ω
GPS GNSS Specifications	GPS Glonass Galileo QZSS BeiDou Compass <i>In-Band Frequency Interference Filter for LTE B13 B14</i>
Frequency Range	1562-1612MHz
LNA Gain	29dB ± 2dB
VSWR	<2.0:1
Out of Band Rejection	>45dB (@ > +/- 100MHz f)
Typical Noise Figure	<-2dB
Notch Filter Rejection @787MHz	24dB
Operating Voltage	3-5V DC
Typical Current	15mA
Mechanical / Environmental Specifications	
Antenna Housing	High Impact UV Stable ABS Polymer (Black or White) Housing Height: 28mm (1.1") / Base Diameter: 73.6mm (2.9")
Connector Types	All Standard RF Connectors Available (Including FAKRA Connector Ends)
15ft Coax Cables (All Cables Full Length)	Cellular 4G 5G AGA200 Coax / Multi Band WiFi Bluetooth AGA200 Coax / GPS GNSS AGA100 Coax * Custom cable length options are available
Bolt Mount Magnetic Mount / Adhesive Mount	Stainless Steel Mounting Bolt: Length 21.73mm (0.855") / Diameter 13.84mm (0.545") 3 x Commercial Grade Rare Earth Magnets w/Baseplate Pad (Includes 3M Adhesive Mount Pad)
Operating Temp	-40° / +80°C (-40° / +176°F)
Ingress Protection	IP69K

Supported Cellular Service Provider Networks	
Verizon	Verizon 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B13 B46 B48 B66 (CBRS B48) 5G NR: N2 N5 N66 N77 Carriers (MVNOs) using Verizon Network: Reach Mobile, Red Pocket Mobile, Spectrum Mobile, Ting Total, Tracfone, Twigby, US Mobile, Visible, Xfinity Mobile
T-Mobile	Mobile 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B12 B25 B26 B41 B48 B66 B71 (CBRS B48) 5G NR: N25 N41 N66 N71 Carriers (MVNOs) using T-Mobile Network Mint Mobile, TextNow, Lyca Mobile, Metro, Red Pocket Mobile Republic Wireless, Simple Mobile, Ting, Tracfone, US Mobile
AT&T	AT&T 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B12 B14 B17 B29 B30 B48 B66 (CBRS B48) GSM: 1900MHz 5G NR: N2 N5 N66 N77 Carriers (MVNOs) using AT&T Network Cricket Wireless, Net 10 Wireless, Red Pocket Mobile, Straight Talk
Supported Cellular Bands	
5G NR Bands	n1 n2 n3 n5 n7 n8 n12 n13 n14 n18 n20 n25 n26 n28 n29 n30 n38 n40 n41 n48-CBRS n66 n71 n75 n76 n77 n78 n79 C-band
4G LTE Bands	B1 B2 B3 B4 B5 B7 B8 B12 B13 B14-FirstNet B17 B18 B19 B20 B25 B26 B28 B29 B30 B32 B38 B39 B40 B41 B42 B43 B46-LAA B48-CBRS B66 B71
3G Bands	B1 B2 B3 B4 B5 B6 B8 B9 B19
Supported WiFi IEEE Standards	
WiFi 1-5	WiFi 1 WiF 2 (802.11ba) WiFi 3 (802.11g) WiFi 4 (802.11n) WiFi 5 (802.11ac)
* WiFi HaLow	WiFi HaLow (802.11ah) * Contact Us For AG46 HaLow WiFi Configuration Options

AG46 MIMO 2-Lead Low-Profile Series Antenna
Dimensions – Bolt Mount

AG46 MIMO 2-Lead Low-Profile Series
Bolt Mount

Height: 28mm (1.1") / Diameter: 73.6mm (2.9")



Stainless Steel Mounting Bolt
Length 21.73mm (0.855")
Diameter 13.84mm (0.545")

AG46 MIMO 2-Lead Low-Profile Series
Bolt Mount





Stainless Steel Mounting Bolt
Length 21.73mm (0.855")
Diameter 13.84mm (0.545")

Anti-Rotation Perma-Seal
Adhesive Baseplate Pad

AG46 MIMO 2-Lead Low-Profile Series Antenna
Dimensions – Magnetic / Adhesive Mount

AG46 MIMO 2-Lead Low-Profile Series
Magnetic / Adhesive Mount Antenna

Height: 28mm (1.1") / Diameter: 73.6mm (2.9")

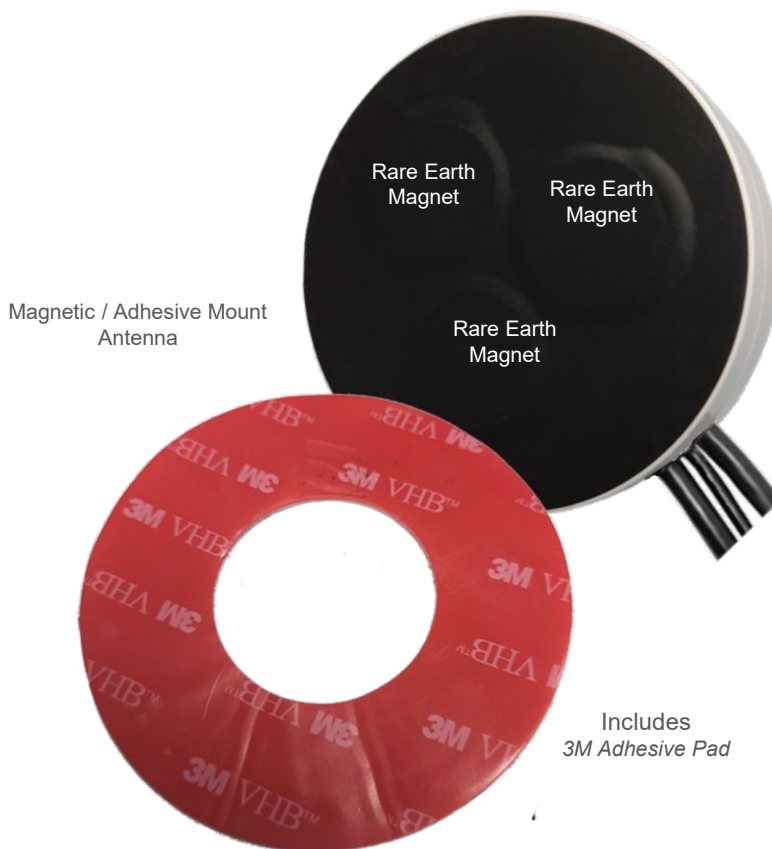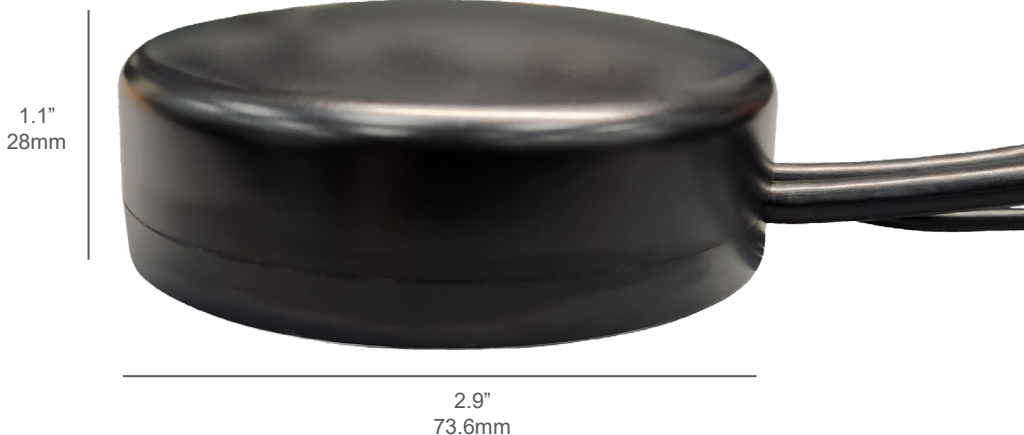

AG46 MIMO 2-Lead Low-Profile Series Antenna

Optional L-Bracket Mount

(Sold Separately)

AG46 Low-Profile Series Bolt Mount Antenna

w/ Optional L-Bracket Mount

Sold Separately



Optional: L-Bracket Mount
w/ U-Bolt Set
Sold Separately

AG46 MIMO 2-Lead Low-Profile Series Antenna - Housing Color Options
Black / White



AG46 MIMO 2-Lead Low-Profile Series Antenna - Coax Cable Labels (SMA)
CELL / WIFI / GPS



AG46 MIMO 2-Lead Low-Profile Series Bolt Mount Antenna Configuration Options

AG46 2-Element
Bolt Mount
Configurations

- AG46-BB-2C: MIMO 2 x Cellular 4G LTE CBRS 5G NR – (Black)
- AG46-BW-2C: MIMO 2 x Cellular 4G LTE CBRS 5G NR – (White)
- AG46-BB-2W: MIMO 2 x Multi-Band WiFi 5 – (Black)
- AG46-BW-2W: MIMO 2 x Multi-Band WiFi 5 – (White)
- AG46-BB-CG: Cellular 4G LTE CBRS 5G NR / GPS GNSS – (Black)
- AG46-BW-CG: Cellular 4G LTE CBRS 5G NR / GPS GNSS – (White)
- AG46-BB-CW: Cellular 4G LTE CBRS 5G NR / Multi-Band WiFi 5 – (Black)
- AG46-BW-CW: Cellular 4G LTE CBRS 5G NR / Multi-Band WiFi 5 – (White)



AG46 MIMO 2-Lead Low-Profile Series Magnetic / Adhesive Mount Antenna Configuration Options

AG46 2-Element
Magnetic / Adhesive Mount
Configurations

- AG46-MB-2C: MIMO 2 x Cellular 4G LTE CBRS 5G NR – (Black)
- AG46-MW-2C: MIMO 2 x Cellular 4G LTE CBRS 5G NR – (White)
- AG46-MB-2W: MIMO 2 x Multi-Band WiFi 5 – (Black)
- AG46-MW-2W: MIMO 2 x Multi-Band WiFi 5 – (White)
- AG46-MB-CG: Cellular 4G LTE CBRS 5G NR / GPS GNSS – (Black)
- AG46-MW-CG: Cellular 4G LTE CBRS 5G NR / GPS GNSS – (White)
- AG46-MB-CW: Cellular 4G LTE CBRS 5G NR / Multi-Band WiFi 5 – (Black)
- AG46-MW-CW: Cellular 4G LTE CBRS 5G NR / Multi-Band WiFi 5 – (White)

